



Assembly Instructions



(W x D x H): 1.22m x 0.93m x 0.92m

Product Name: Lily Relax 2 Seater Bench

Pressure Treated products should not be treated with any other products for the first month.

PLEASE KEEP THIS INSTRUCTION

Zest4Leisure

01352 752555 option 1 – sales@zest4leisure.co.uk

Lily Relax 2 Seater Bench Assembly Instructions


Requires 2 person assembly.

Tools required: Corded / Cordless Drill, Hex Bit / Screwdriver, 3mm Drill Bit required in order for you to drill all screw holes before construction.

The colour version of this document can be downloaded from:
www.zest4leisure.co.uk/downloads/category/C1

Lily Relax 2 Seater Bench Pack List		
Item	Description	Quantity
A	Back Support Assembly	1
B	Seat Assembly	1
C	Back Assembly	1
D1/D2	Armrest/Leg Assembly	2

Fixings		
	50mm Screws	8
	Hex Bolts	6
	'T' Nuts	6

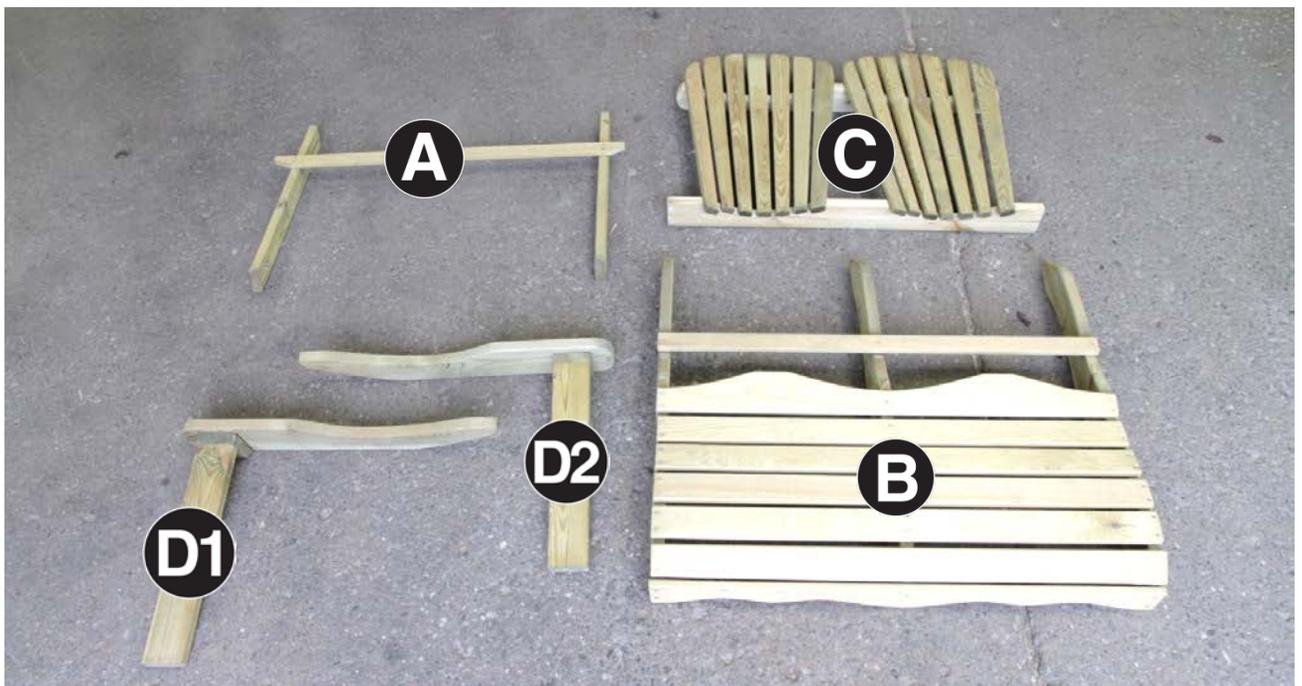

Please take a few moments to check all pack contents listed.

Assembly requires 2 persons.

Tools required: Corded/Cordless Drill, Hex Bit/Screwdriver, 3mm Drill Bit required in order for you to drill all screw holes before construction.

1. Insert Back Assembly A between rear legs of Seat Assembly B, align bolt holes and insert 2no Hex Bolts and 'T' Nuts. See Figs. 1a & 1b.
Do not fully tighten at this stage.
2. Locate Back Assembly C as shown in Fig 2a and fix in position using 6no Screws. See Figs 2b & 2c.
3. Attach Armrest/Leg Assembly D1 to Seat Assembly B shown in Fig.3a using 2no Hex Bolts and 'T' Nuts. Do not fully tighten.

Attach Armrest/Leg Assembly D1 to Back Support Assembly A using 1no Screw. See Fig.3b.

Repeat procedure for Armrest/Leg Assembly D2.

Fully tighten all bolts at this stage.

Lily Relax 2 Seater Bench is now complete.


1a




1b




2a

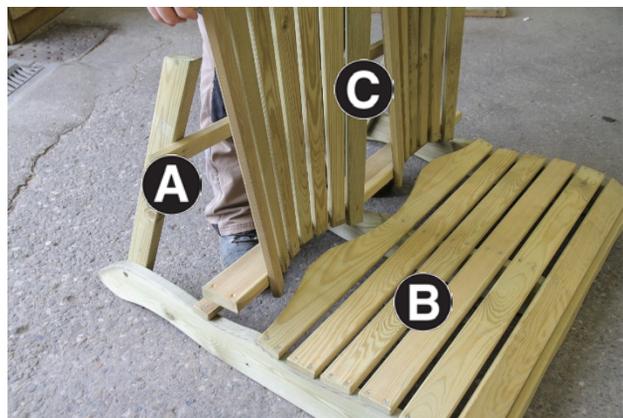

2b

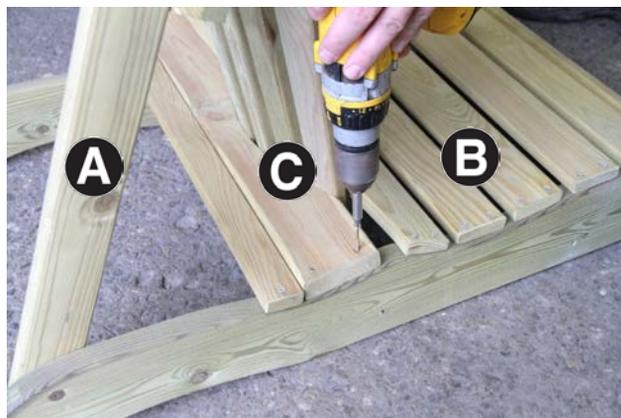

2c

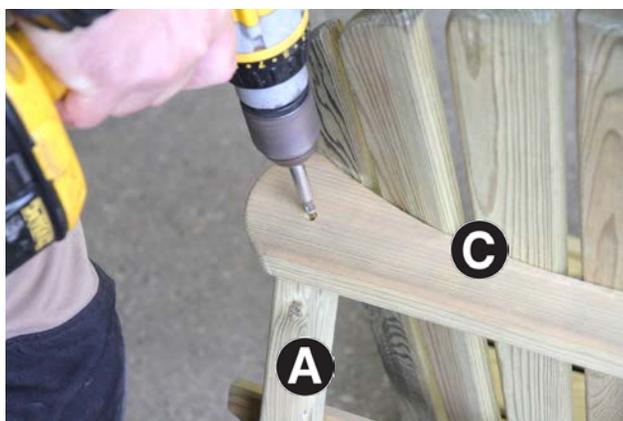

3a



3b



4b