

Assembly Instructions **Tenby Arbour**

Code: 25222 V5 07 24



 $(W \times D \times H)2.07m \times 0.85m \times 2.07m$



ONLINE ASSEMBLY VIDEO AVAILABLE Please scan the QR code or visit zestoutdoorlivingsupport.co.uk



PLEASE KEEP THESE INSTRUCTIONS

Every Zest product is unique because each piece of timber has its own distinctive, natural features



Zest is a leading timber specialist, designing and manufacturing award winning wooden garden products, crafted from natural slow-grown European redwood. Unlike man-made materials, timber is an entirely natural material, and each piece has its own distinctive qualities. So, owning a Zest timber product is like enjoying a unique slice of nature.

The benefits of slow grown timber:

Trees grow slowly in the cold climate of Eastern Europe producing stronger and close grained timber ideal for making quality outdoor products.



Natural and Unique



There may be variations in the timber's colour or shading, but these will fade away over time when exposed to sunlight.



changing seasons in each year of growth create characteristics unique to each tree - and to every piece of timber. Branches create an embedded mark in the tree trunk, resulting in a knot. Knots are a unique and natural feature which tells the story of the tree.



Owing to timber's natural moisture content, variations in temperature and humidity can cause expansion and contraction and may result in cracks and splits in any product made from natural timber. Any cracks and splits in the timber grain will alter with the changing seasons. They do not compromise the strength and durability of the product - they just add to its unique character.



Most Zest products are pressure treated which protects the timber from rot for many years. Pressure treatment can result in a small amount of 'green spotting' on the surface of new timber caused by natural salts leaving the wood. This will fade away over time.

These visible changes are not a fault or a cause for concern and do not affect the structural integrity of the product. They are a result of how the timber matures and responds to its natural environment.

Ethically Sourced

Zest's slow grown European redwood is sourced from responsibly managed PEFC certified forests. This means forests are used in a way that maintains biodiversity, regeneration, and nature conservation. PEFC tracks certified timber from the forest to the final product giving complete confidence to the customer. www.pefc.co.uk



Replanting

Zest with its main supply partners is dedicated to replanting woodland and is collaborating on the nurture of wildlife habitats.

Advisory Notices

- Roofs are weather resistant and not guaranteed to be watertight unless otherwise stated.
- Items with enclosed storage or cupboard space are weather resistant and are not watertight unless otherwise stated.
- Be aware of trap hazards if a Zest product has moving parts.
- All products should be positioned on solid, level ground
- Anchor down products where applicable using appropriate fixings.
- Roofs are not weight bearing
- Sanitise all catering surfaces prior to use.

Tenby Arbour Assembly Instructions

Requires: 2 person assembly.

Tools required: Corded / cordless drill, 3 mm drill bit as all screw holes need to be predrilled, Pozi drive bit / Screwdriver (*Crosshead)

We advise the product is situated on firm level ground and anchored to the ground or wall with suitable fixings (not supplied).

Please take a few moments to check all pack contents listed


Tenby Arbour Pack List				
Code	Item	Description	Quantity	
28090	А	Seat Back	1	
28091	В	Seat	1	
28092	C1	Side Panel Left	1	
28093	C2	Side Panel Right	1	
28094	D	Back Panels	2	
28095	Е	Roof Panels	2	
27830	F	Roof Support	1	
27831	G	Roof Capping	1	
27832	Н	Fascias	4	
28096	J	Finials	2	

28097 - Tenby Arbour Fixings List			
Item	Description	Quantity	
1	35mm Screws	12	
2	40mm Screws	8	
3	50mm Screws	20	
4	60mm Screws	4	
5	45mm Bolt, Nuts & Washers	6	
6	90mm Bolt, Nuts & Washers	6	



This product is made from pressure-treated timber. It should not be painted or coated with any other treatment until at least 6 months after purchase





Interlock joints in Seat Back (A) with Seat (B) as shown in Fig. 1 and secure using 6x 45mm bolts, nuts & washers. (2x 45mm bolts per joint).









Insert 2x90mm bolts fully through the side holes (C2) and align with holes in the seat base assembly (B). Guide the seat assembly (B) onto the bolts. Use the movement in the bolts to position the seat flush against the side panel and behind the front post (C2) (see fig.2d). Repeat for other side using panel (C1). Secure the seat assembly back to the sides with 2 x 90mm bolts.





Position 1x Back Panel (D) in to base of block stopper in side panels and fix using 4x 40mm screws (2x screws per side).



Position remaining Back Panel (D) as shown in Fig. 4 and attach using 4x 40mm screws (2x 40mm screws per side)





Attach 1x Roof Panel (E) to Roof Support (F) using 2x 60mm screws as shown in Figs. 5a &

Note: Ensure roof board overlap are in correct orientation as to avoid rainwater ingress.




Attach remaining Roof Panel (E) using 2x 60mm screws as shown in Fig. 5c (1x 60mm screw at each end).





Fix Roof Capping (G) to Roof Panels (E) using 4x 35mm screws (2x 35mm at each end) Note: Do not lay the roof flat on the apex at this point.

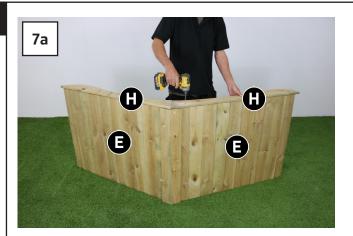






Set out 2x Fascia (H) as shown and attach to roof assembly using 6x50mm screws (3x 50mm screws per fascia).

Position Finial (J) as shown and attach using 4x 35mm screws.

Repeat procedure for remaining Fascia (H) and Finial (J) on opposite side of roof assembly.

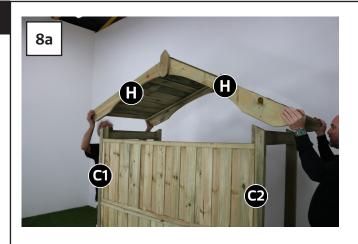



Locate roof assembly onto Side Panel (C1 & C2) posts and fix in position using 8x 50mm screws (2x 50mm screws per post).





The Tenby Arbour is now complete.